

**Specification****HUR2103X**

XPON ONU

1G3F+POTS+CATV

1 OVERVIEW

- HUR2103X is designed as HGU (Home Gateway Unit) in different FTTH solutions. The carrier-class FTTH application provides different services access.
- HUR2103X is based on mature and stable, cost-effective XPON technology.
- HUR2103X adopts high reliability, easy management, configuration flexibility and good quality of service guarantees to meet the technical performance of EPON Standard of China Telecom CTC3.0 and GPON Standard of ITU-TG.984.X

2 FUNCTIONAL FEATURE

- Support EPON/GPON mode and switch mode automatically
- Support Route mode for PPPoE/IPoE/Static IP and Bridge mode
- Support IPv4 and IPv6 Dual mode
- Support SIP Protocol for VoIP Service
- Support CATV interface for Video Service and remote control by Major OLT
- Support LAN IP and DHCP Server configuration
- Support Port Mapping and Loop-Detect
- Support Firewall function and ACL function
- Support IGMP Snooping/Proxy multicast feature
- Support TR069 remote configuration and maintenance
- Specialized design for system breakdown prevention to maintain stable system


HARDWARE SPECIFICATION

Technical item	Details
PON Interface	1 GPON BOB (Bosa on Board) Receiving sensitivity: ≤ -27 dBm Transmitting optical power: 0~+5dBm Transmission distance: 20KM
Wavelength	TX: 1310nm, RX: 1490nm
Optical Interface	SC/APC Connector
Chip Spec	RTL9602C, DDR2 64MB
Flash	SPI Nor Flash 16MB
LAN Interface	1 x 10/100/1000Mbps(GE) and 1 x 10/100Mbps(FE) auto adaptive Ethernet interfaces. Full/Half, RJ45 connector
CATV Interface	RF, WDM, optical power : +2~-15dBm Optical reflection loss: ≥ 45 dB Optical receiving wavelength: 1550 \pm 10nm RF frequency range: 47~1000MHz, RF output impedance: 75 Ω RF output level: 78dBuV AGC range: -13~+1dBm MER: ≥ 32 dB@-15dBm
Operating Condition Push-Button LED POTS interface	1 FXS, RJ11 connector Support: G.711/G.723/G.726/G.729 codec Support: T.30/T.38/G.711 Fax mode, DTMF Relay Line testing according to GR-909 8 LED, For Status of PWR、LOS、PON、LAN1~LAN2、FXS、Worn、Normal(CATV) 1, For Function of Factory Reset Temperature: 0 $^{\circ}$ C ~+50 $^{\circ}$ C
Power Supply Storing Condition	Humidity: 10%~90% (non-condensing) Temperature: -30 $^{\circ}$ C ~+60 $^{\circ}$ C Humidity: 10%~90% (non-condensing) DC 12V/1A
Power Consumption	≤ 6 W
Dimension	180mm \times 107mm \times 28mm (L \times W \times H)
Net Weight	0.2Kg

4 PANEL LIGHTS INTRODUCTION

Pilot Lamp	Status	Description
PWR	On	The device is powered up.
	Off	The device is powered down.
LOS	Blink	The device does not receive optical signals or with low signals.
	Off	The device has received optical signal.
PON	On	The device has registered to the PON system.
	Blink	The device is registering the PON system.
	Off	The device registration is incorrect.
LAN1~LAN2	On	Port (LANx) is connected properly (LINK).
	Blink	Port (LANx) is sending or/and receiving data (ACT).
	Off	Port (LANx) connection exception or not connected.
FXS	On	Phone has registered to the SIP Server.
	Blink	Phone has registered and data transmission (ACT).
	Off	Phone registration is incorrect.
Worn(CATV)	On	Input optical power is higher than 3dbm or lower than -15dbm
	Off	Input optical power is between -15dbm and 3dbm
Normal(CATV)	On	Input optical power is between -15dbm and 3dbm
	Off	Input optical power is higher than 3dbm or lower than -15dbm

5 APPLICATION

- Typical Solution: FTTH(Fiber To The Home)
- Typical Business: INTERNET、IPTV 、VOIP、CATV etc

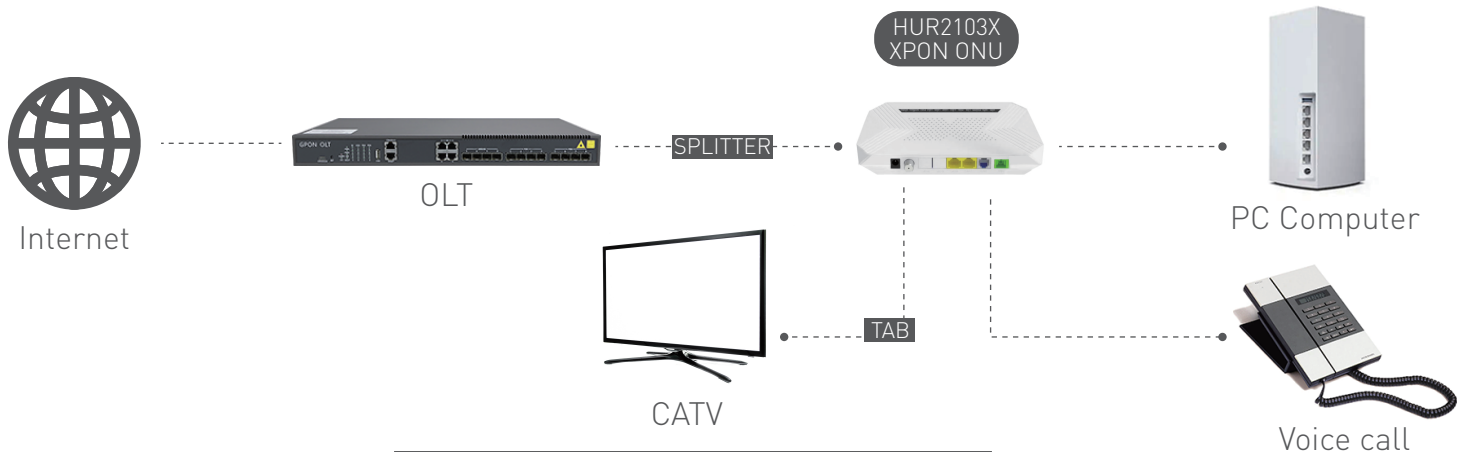


Figure: HUR2103X Application Diagram