

Specification
HUR2104X
XPON ONU 1G1F+CATV

1 OVERVIEW

- HUR2104X is designed as HGU (Home Gateway Unit) in different FTTH solutions. The carrier-class FTTH application provides different services access.
- HUR2104X is based on mature and stable, cost-effective XPON technology.
- HUR2104X adopts high reliability, easy management, configuration flexibility and good quality of service guarantees to meet the technical performance of EPON standard of China Telecom CTC3.0 and GPON Standard of ITU-TG.984.X

2 FUNCTIONAL FEATURE

- Support EPON/GPON mode and switch mode automatically.
- Support Route mode for PPPoE/IPoE/Static IP and Bridge mode.
- Support IPv4 and IPv6 Dual mode.
- Support CATV interface for Video Service and remote control by Major OLT.
- Support LAN IP and DHCP Server configuration.
- Support Port Mapping and Loop-Detect.
- Support Firewall function and ACL function.
- Support IGMP Snooping/Proxy multicast feature.
- Support TR069 remote configuration and maintenance.
- Specialized design for system breakdown prevention to maintain stable system.

HARDWARE SPECIFICATION

Item	Parameter
PON Interface	1 GPON BOB (Bosa on Board) Receiving sensitivity \leq -27dBm Transmitting optical power: 0~+5dBm Transmission distance: 20km
Wavelength	TX: 1310nm, RX: 1490nm
Optical Interface	SC/APC Connector
Chip Spec	RTL9602C, DDR2 64MB
Flash	SPI Nor Flash 16MB
LAN Interface	1x10/100/1000Mbps(GE) and 1x10/100Mbps(FE) auto adaptive Ethernet interfaces. Full/Half, RJ45 connector.
CATV Interface	RF, WDM, optical power: +2~-15dBm Optical reflection loss \geq 45dB Optical receiving wavelength: 1550 \pm 10nm RF frequency range: 47~1000MHz RF output impedance: 75 Ω RF output level: 78dBuV AGC range: -13~+1dBm MER \geq 32dB@-15dBm
LED	7LED, For Status of PWR, LOS, PON, LAN1~LAN2, Worn, Normal(CATV)
Push-Button	1, For Function of Factory Reset
Operating Condition	Temperature: 0 $^{\circ}$ C ~+50 $^{\circ}$ C Humidity: 10%~90%(non-condensing)
Storing Condition	Temperature: -30 $^{\circ}$ C ~+60 $^{\circ}$ C Humidity: 10%~90%(non-condensing)
Power Supply	DC 12V/1A
Power Consumption	\leq 6W
Dimension	180mm \times 107mm \times 28mm(L \times W \times H)
Net Weight	200g

PANEL LIGHTS INTRODUCTION

Pilot Lamp	Status	Description
PWR	ON	The device is powered up
	OFF	The device is powered down.
LOS	BLINK	The device does not receive optical signals or with low signals.
	OFF	The device has received optical signal.

Pilot Lamp	Status	Description
PON	ON	The device has registered to the PON system.
	BLINK	The device is registering the PON system.
	OFF	The device registration is incorrect.
LAN1~LAN2	ON	Port (LANx) is connected properly (LINK).
	BLINK	Port (LANx) is sending or/and receiving data (ACT).
	OFF	Port (LANx) connection exception or not connected.
WORN (CATV)	ON	Input optical power is higher than 3dbm or lower than -15dbm.
	OFF	Input optical power is between -15dbm and 3dbm.
NORMAL (CATV)	ON	Input optical power is between -15dbm and 3dbm.
	OFF	Input optical power is higher than 3dbm or lower than -15dbm.

5 APPLICATION

- Typical Solution : FTTH(Fiber To The Home)
- Typical Business : INTERNET, IPTV, CATV, etc.

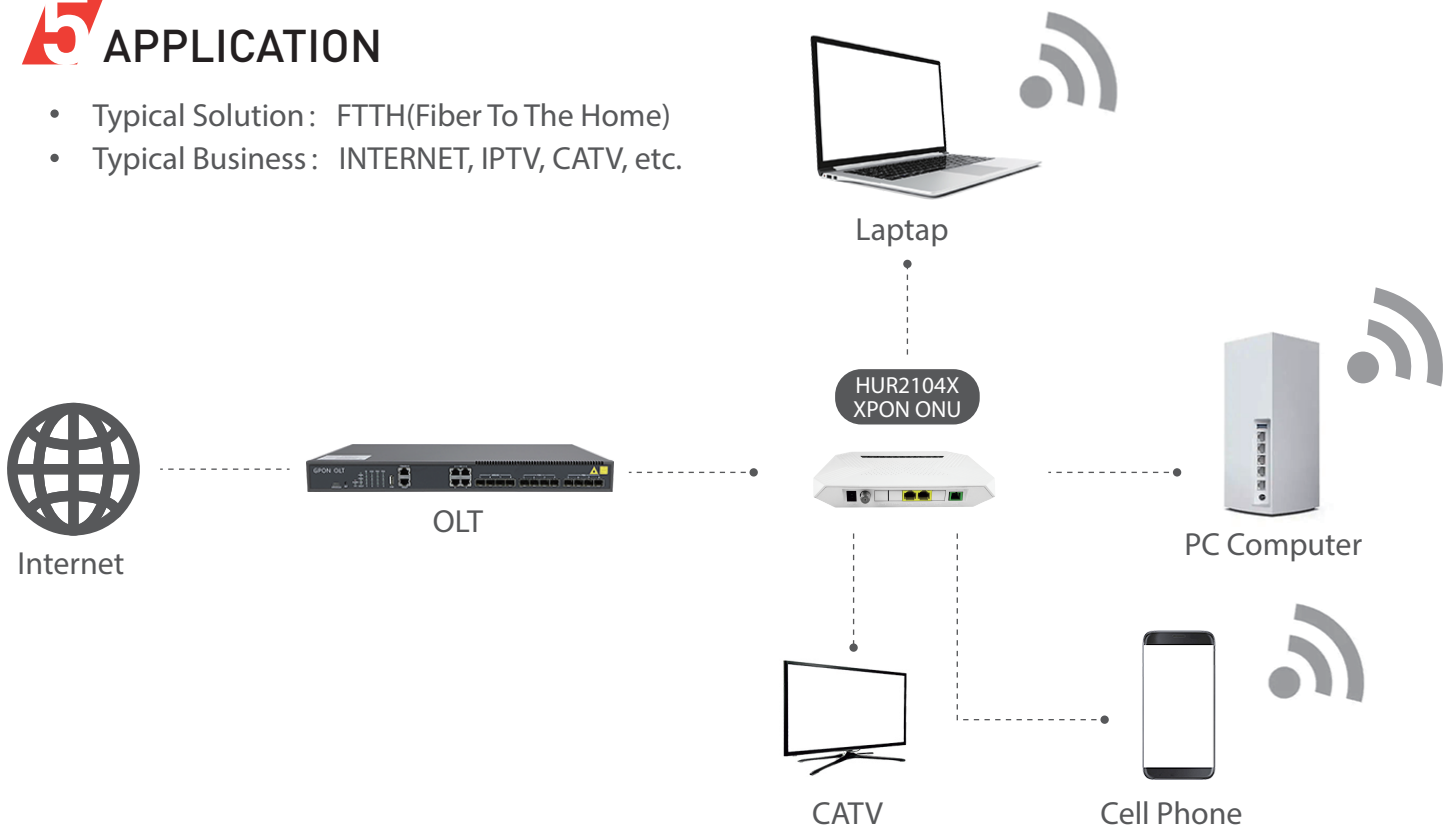


Figure: HUR2104X Application Diagram